





**TECHNICAL SPECIFICATIONS**

	<b>AXENIA LC 14</b>	<b>AXENIA LC 22</b>	<b>AXENIA LC 24</b>
Voltage:	Power Supply - 100-277 VAC LED Modules - 30VDC	Power Supply 100-277 VAC LED Modules - 30VDC	Power Supply 100-277 VAC LED Modules - 30VDC
Power consumption:	30W Power Factor >.95	30W / 60W Power Factor >.95	50 W / 75 W Power Factor >.95
Dimming:	0-10VDC	0-10VDC	0-10VDC
Frame Dimensions W/D/H	11.81in x 47.24in x .472in / 300mm x 1200mm x 12mm	23.62in x 23.62in x .472in / 600mm x 600mm x 12mm	23.62in x 47.24in x .472in / 600mm x 1200mm x 12mm
CRI:	75	75	75
CCT:	4000K / 5000K	4000K / 5000K	4000K / 5000K
Luminous Flux:	30W - 2150lms	30W - 2150lms / 60W - 3561lms.	50W - 3724lms / 75W - 5609lms.
Operating Temperature:	-20° C - +50° C	-20° C - +50° C	-20° C - +50° C
Storage Temperature:	-30° C - +60° C	-30° C - +60° C	-30° C - +60° C
Protection class:	P20	IP20	IP20
L70 Rated Lifespan:	>50,000hrs.	>50,000hrs.	>50,000hrs.


Notes: Wattage +/- 10% CCT Values +/- 200K Lumen Values +/- 250Lms. CRI +/- 5%

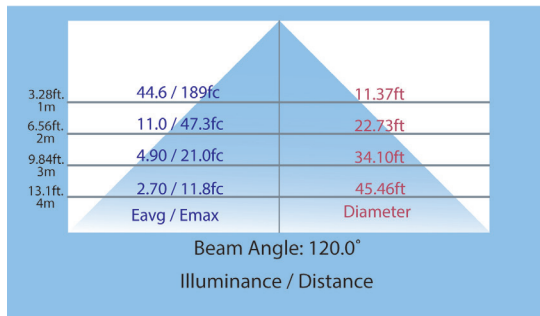


**Axenia LC 24 75W**

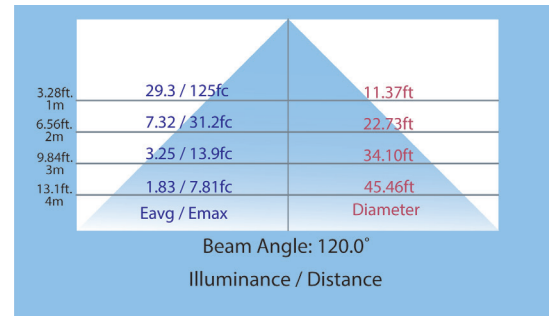

**Axenia LC 24 50W**

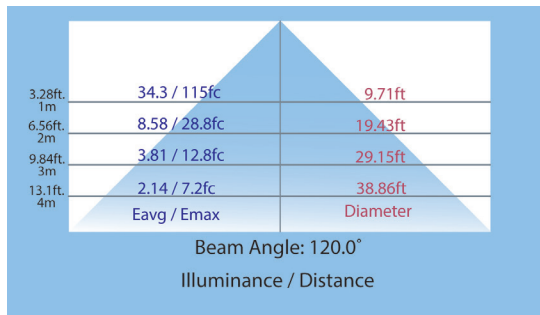

**Axenia LC 22 60W**

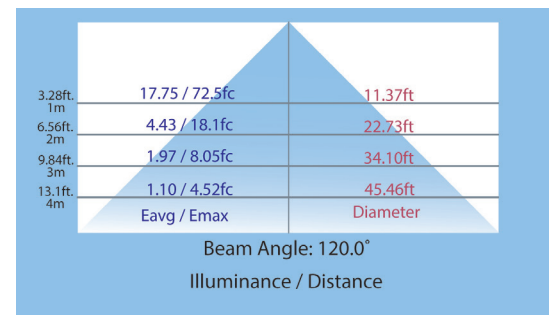

**Axenia LC 22 30W**

ZENARO LIGHTING INC  
3610 Quantum Blvd.  
Boynton Beach, FL 33426

Phone: 561 424 2444  
Fax: 561 424 2440

[www.zenarolighting.com](http://www.zenarolighting.com)



**AXENIA LC SERIES  
DATA SHEET**



The Axenia LC series flat panel fixtures are both efficient and effective for general illumination in offices, schools, medical, hospitality and many other interior applications. The fixture panel is less than ½ in. - 12mm in width and is available in either square or rectangle shapes for installation in all conventional ceiling grid sizes and configurations.

**FEATUTRES & BENEFITS**

- ▶ Auto sensing 100 - 277VAC for ease of installation.
- ▶ Dimmable with standard 0-10V systems.
- ▶ Non directional - homogeneous illumination.
- ▶ Contemporary design to replace older style troffers.
- ▶ Reliable and maintenance free lifetime.
- ▶ Fast and simple installation.

PART NUMBER SPECIFICATION							
Model	Series	Power	CCT	Dimming	Voltage	Mount	Frame Finish
OLAX - LC -	14	30			IDS	R	CA
Axenia LC	14- 1ft x 4ft	30 - 30W	40 - 4000K 50 - 5000K	D10 - 0-10VDC N - Non Dim	100 - 277VAC	R - Recessed Mount	Clear Anodized

OLAX - LC -	22		40		IDS	R	CA
Model	Series	Power	CCT	Dimming	Voltage	Mount	Frame Finish
Axenia LC	22- 2ft x 2ft	30 - 30W 60 - 60W	40 - 4000K 50 - 5000K	D10 - 0-10VDC N - Non Dim	100 - 277VAC	R - Recessed Mount	Clear Anodized

OLAX - LC -	24		40		IDS	R	CA
Model	Series	Power	CCT	Dimming	Voltage	Mount	Frame Finish
Axenia LC	24- 2ft x 4ft	50 - 50W 75 - 75W	40 - 4000K 50 - 5000K	D10 - 0-10VDC N - Non Dim	100 - 277VAC	R - Recessed Mount	Clear Anodized

Project:	
Part Number:	
Notes:	
Approval:	Date:

[www.zenarolighting.com](http://www.zenarolighting.com)

ZENARO LIGHTING INC  
3610 Quantum Blvd.  
Boynton Beach, FL 33426

Phone: 561 424 2444  
Fax: 561 424 2440